**THE UNITED STATES OF AMERICA****TO ALL TO WHOM THESE PRESENTS SHALL COME:**

**UNITED STATES DEPARTMENT OF COMMERCE**  
**United States Patent and Trademark Office**

*August 27, 2004*

**THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM  
THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK  
OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT  
APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A  
FILING DATE UNDER 35 USC 111.**

**APPLICATION NUMBER: 60/509,011**  
**FILING DATE: *October 06, 2003***

Certified by

**Jon W Dudas**

**Acting Under Secretary of Commerce  
for Intellectual Property  
and Acting Director of the U.S.  
Patent and Trademark Office**



Please type a plus sign (+) inside this box → +

PTO/SB/18 (02-01)

Approved for use through 10/31/2002. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE  
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

## PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a r qu st f r filing a PROVISIONAL APPLICATION FOR PATENT und r 37 CFR 1.53 (c).

Express Mail Label No. EV312069701

Date f D p sit Oct. 6, 2003

### INVENTOR(S)

Given Name (first and middle (if any))	Family Name or Surname	Residence (City and either State or Foreign Country)
Eric	Jonsen	Seattle, Washington

☐ Additional inventors are being named on the \_\_\_\_\_ separately numbered sheets attached hereto

### TITLE OF THE INVENTION (280 characters max)

APPARATUS AND METHOD FOR PACKAGING AN ELECTRODE

### CORRESPONDENCE ADDRESS

Direct all correspondence to:

☒ Customer Number

24737

Place Customer Number  
Bar Code Label here

OR

Type Customer Number here

☐ Firm or  
Individual Name

Address

Address

City

State

ZIP

Country

Telephone

Fax

### ENCLOSED APPLICATION PARTS (check all that apply)

☒ Specification Number of Pages

15

☐ CD(s), Number

☒ Drawing(s) Number of Sheets

1

☐ Other (specify)

☐ Application Data Sheet. See 37 CFR 1.76

### METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)

☐ Applicant claims small entity status. See 37 CFR 1.27.

☐ A check or money order is enclosed to cover the filing fees

☒ The Commissioner is hereby authorized to charge filing fees or credit any overpayment to Deposit Account Number:

14-1270

FILING FEE  
AMOUNT (\$)

160

☐ Payment by credit card. Form PTO-2038 is attached.

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are: \_\_\_\_\_.

Respectfully submitted,

SIGNATURE

Date

10/6/03

TYPED or PRINTED NAME

Tony E. Piotrowski

REGISTRATION NO.  
(if appropriate)

42,080

Docket Number:

US030295

TELEPHONE 914 333-9609

## USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

This collection of information is required by 37 CFR 1.51. The information is used by the public to file (and by the PTO to process) a provisional application. Confidentiality is governed by 35 U.S.C. 122 and 37 CFR 1.14. This collection is estimated to take 8 hours to complete, including gathering, preparing, and submitting the complete provisional application to the PTO. Time will vary depending upon the individual case. Any comments on the amount of time you require to complete this form and/or suggestions for reducing this burden, should be sent to the Chief Information Officer, U.S. Patent and Trademark Office, U.S. Department of Commerce, Washington, D.C., 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, D.C. 20231.

## APPARATUS AND METHOD FOR PACKAGING AN ELECTRODE

Aspects of this invention relate generally to electrode storage, and more particularly to an apparatus and method for packaging a medical electrode, and to an electrotherapy device having an electrode.

Modern medical electrode packaging provides a sealed electrode storage environment and through-wall electrical connectivity to electrotherapy devices such as external defibrillators. Most modern electrodes use a water-based gel to adhere the electrode to the skin and to provide a good conductive path between skin and electrode. Because the hydrogels tend to gradually dry out and become ineffective, sealing of the electrode from the environment extends the shelf-life of the electrode significantly. Thus, electrode packaging is typically either a flexible, heat-sealable laminate material, or a rigid, molded plastic material, which serves as a moisture barrier.

Flexible housings provide economical, simple packaging for electrodes in many instances. Electrode wiresets extend through exteriors of known flexible housings, and connect directly to electrotherapy devices. Electrode function or sterility, however, may be compromised when electrode wiresets protrude through flexible housings--for example, flexing may weaken the bond between the electrode wireset and the flexible material, and/or the flexible material may remain adhered to electrode wiresets after placement of electrodes on a patient, causing user confusion or delay. Adequately sealing areas where electrode wiresets extending through flexible housings may increase manufacturing costs or complexity.

Rigid structures offer an alternative to flexible housings. Walls of rigid structures may include insert-molded electrical contacts, such as pins, which provide through-wall electrical connectivity between enclosed electrode wiresets and external electrotherapy devices. Although rigid housing structures may sometimes be more expensive and have higher manufacturing costs than flexible housings, rigid structures are often selected because they have been designed to enclose electrode wiresets without compromising the structures' seals, and they offer simple user interfaces. Rigid structures, however, may be less desirable in some applications at high altitudes, when pressures inside the structures greatly exceed ambient pressures, and heat-seal film, which is often stretched over structure openings, may be vulnerable to puncture.

There is therefore a need for an apparatus and method for packaging a medical electrode, which is adapted for use with a heat-sealable flexible enclosure material, which encloses the electrode wireset without compromising the enclosure seal, which enables the electrode to remain responsive to an electrotherapy device during storage and patient use, and which has a simple user interface.

In accordance with one aspect of the present invention, an apparatus for packaging a medical electrode having an electrode wireset is provided. The apparatus is for use with a heat-sealable flexible material, which has an interior side and an exterior side. The interior side is arrangeable to receive the electrode wireset. The apparatus includes a housing, and the housing includes a first housing side at least in part defining an electrode connection region, the electrode connection region sized to receive the medical electrode, and a second housing side opposed to the first housing side, the second housing side at least in part defining a medical device connection region, the medical device connection region sized to receive at least a part of a medical device that utilizes the medical electrode. The apparatus further includes a sealing surface having an attachment area adapted for attachment to the heat-sealable flexible material, a first sealing surface side, and a second sealing surface side opposed to the first sealing surface side. The first sealing surface side is coupled to the first housing side, and the second sealing surface side is coupled to the second housing side. A signal conductor having a first end and a second end is also included in the apparatus. The signal conductor is operable to provide a signal path traversing the heat-sealable flexible material. The first end is arranged in the electrode connection region and arranged to respond to the medical electrode, and the second end is arranged in the medical device connection region and arranged to respond to the at least part of the medical device. When the attachment area is attached to the heat-sealable flexible material, the electrode connection region is disposed on the interior side of the heat-sealable flexible material, and the medical device connection region is disposed on the exterior side of the heat-sealable flexible material. When the electrode is arranged in the electrode connection region and is responsive to the first end of the signal conductor, and at the least part of the medical device is arranged in the medical device connection region and is responsive to the second end of the signal conductor, in such a manner that the signal path is operating, the electrode is responsive to the medical device via the signal path.

Further features of the above-described aspect of the present invention may include monitoring by the medical device, which may be an external defibrillator, of the functioning

of the electrode via the signal path. The heat-sealable flexible material may be a hermetically sealable pouch for storing the electrode, which may store the electrode wireset on the interior side. The sealing surface of the housing, which may be a molded plastic housing, may be a planar flange, integral to the molded plastic housing, with the attachment area outside of a perimeter of the housing, and the signal conductor may be an electrical conductor.

In accordance with another aspect of the present invention, a method for packaging a medical electrode includes: providing a housing, the housing including: a first housing side at least in part defining an electrode connection region, the electrode connection region sized to receive the medical electrode; and a second housing side opposed to the first housing side, the second housing side at least in part defining a medical device connection region, the medical device connection region sized to receive at least a part of a medical device that utilizes the medical electrode; providing a sealing surface having an attachment area adapted for attachment to the heat-sealable flexible material, a first sealing surface side, and a second sealing surface side opposed to the first sealing surface side, the first sealing surface side coupled to the first housing side, and the second sealing surface side coupled to the second housing side; arranging a first end of a signal conductor operable to provide a signal path traversing the heat-sealable flexible material in the electrode connection region; arranging a second end of the signal conductor in the medical device connection region; attaching the attachment area to a heat-sealable flexible material in such a manner that the electrode connection region is disposed on an interior side of the heat-sealable flexible material and the medical device connection region is disposed on an exterior side of the heat-sealable flexible material; and arranging the electrode in the electrode connection region in such a manner that when the at least part of the medical device is disposed in the medical device connection region, the signal path is operable and the electrode is responsive to the medical device, and in such a manner that an electrode wireset associated with the electrode is disposed on the interior side of the heat-sealable flexible material; and after arranging the electrode, sealing the heat-sealable flexible material to form a container for storage of the electrode, the interior side of the heat-sealable flexible material defining at least part of the inside of the container.

According to a further aspect of the present invention, an electrotherapy device includes a controller; an energy source; an energy delivery connector responsive to the energy source; and at least one medical electrode having a wireset, the medical electrode for attachment to a patient. The medical electrode has packaging enclosing the wireset, and the

packaging includes: a heat-sealable flexible material defining a pouch, the heat-sealable flexible material having an interior side, defining the inside of the pouch, and having an exterior side. The packaging further includes a housing, which includes a first housing side defining an electrode connection region, disposed on the interior side of the heat-sealable flexible material and at least in part housing the medical electrode; and a second housing side opposed to the first housing side, the second housing side defining an electrotherapy device connection region, disposed on the exterior side of the heat-sealable flexible material and sized to receive the energy delivery connector. A sealing surface having an attachment area attached to the heat-sealable flexible material, a first sealing surface side, and a second sealing surface side opposed to the first sealing surface side, the first sealing surface side coupled to the first housing side, and the second sealing surface side coupled to the second housing side, is a further element of the packaging, along with a signal conductor having a first end and a second end, operable to provide a signal path traversing the heat-sealable flexible material, the first end arranged in the electrode connection region and coupled to the medical electrode, and the second end arranged in the electrotherapy device connection region and arranged for coupling to the energy delivery connector. The electrotherapy device further includes an energy delivery system operable by the controller to deliver electrical energy to the electrode via the signal path, when the energy delivery connector is coupled to the second end of the signal conductor.

FIG. 1 illustrates a medical electrode usable in connection with aspects of the present invention.

FIG. 2 is a schematic block diagram of an external defibrillator system usable in connection with the medical electrode of FIG. 1, and in connection with aspects of the present invention.

FIG. 3 is a partial perspective view of an apparatus for packaging a medical electrode in accordance with aspects of the present invention.

FIG. 4 is cross-sectional side view of the apparatus shown in FIG. 3.

FIG. 5 depicts the apparatus shown in FIGs. 3 and 4 in use with a heat-sealable flexible material, in accordance with aspects of the present invention.

Turning now to the drawings, wherein like numerals designate like components, FIG. 1 illustrates basic functional elements of a medical electrode 12, which may be packaged in accordance with certain aspects of the present invention. Electrode 12 includes a patient portion 13, a wireset 14 coupled to patient portion 13, and a detachably connectable electrode

adapter 16 coupled to wireset 14. Electrode 12 may be used with an electrotherapy system, such as an automatic or manual external defibrillator system, or another type of electrotherapy system, such as pacing or cardiac monitoring systems.

5 A schematic block diagram of an external defibrillator system 200 that uses electrode 12 is depicted in FIG. 2. Defibrillator system 200 includes an energy source 202, which provides voltage or current pulses. A controller 204 operates an energy delivery system 206 to selectively connect and disconnect energy source 202 to and from one or more electrodes 12 electrically attachable to a patient 208. Defibrillator system 200 may further include elements (not shown) such as user input and/or output devices or displays, memories, or  
10 computer-executable instructions implemented in software, firmware, hardware or a combination thereof.

A signal path between defibrillator 200 and electrode 12 is provided via electrode interface 210, which may form part of, or be separate from, defibrillator system 200. Electrode interface 210 includes, at least in part, areas for receiving electrode adapter 16 and  
15 an energy delivery connector 211 (which may be, for example, an electrical plug), and further includes apparatus 10 configured in accordance with aspects of the present invention (discussed further below).

Apparatus 10 is shown in partial perspective view in FIG. 3, and in more detail in cross-sectional side view along line IV-IV in FIG. 4. Referring to FIG. 3, apparatus 10 is  
20 adapted for use with a heat-sealable flexible material 32, which has an interior side 34 (shown in cut-away view in FIG. 3) and an exterior side 36 (not visible; shown in FIG. 5 and discussed further below.) Material 32 is preferably arranged in laminate form, having at least three layers. A top layer is comprised of a non-conductive material with good printability such as polypropylene. A second layer is comprised of a moisture barrier, such as  
25 aluminum foil and/or low-density polyethylene. A bottom layer is comprised of a heat-sealable material such as polyethylene. A heat-sealable flexible laminate material 32 suitable for use with apparatus 10 is commercially available from Cadillac Products, Incorporated in Troy Michigan. Material 32 could alternatively be comprised of two layers, including a moisture barrier layer and a heat-sealing layer. The layers may also be arranged in a different  
30 order.

Referring to FIG. 4, apparatus 10 includes a housing 20 having two sides. A first housing side 18 defines an electrode connection region 28, which is sized to receive at least a portion of electrode 12, such as electrode adapter 16. A second housing side 19 defines a

medical device connection region 29, which is sized to receive at least a part of a medical device, such as energy delivery connector 211 from defibrillator system 200 (shown in FIG. 2). As shown, housing sides 18, 19 have partially open polyhedrous configurations, although housing sides 18 and 19 may assume any desired geometric configurations. Housing 20 is preferably an integral, molded plastic device, but may be formed of a plurality of interconnected parts of any suitable material.

A sealing surface 22 having two sides 24, 26 is coupled to housing 20. As shown, sealing surface side 24 is coupled to first housing side 18, and sealing surface side 26 is coupled to second housing side 19. Sealing surface 22 also has an attachment area 23, for attaching sealing surface 22 to one or more laminate layers of heat-sealable flexible material 32 (shown in FIG. 3). Attachment area 23 preferably extends outside of a perimeter of housing 20, but may be interposed between housing sides 18, 19. Sealing surface 22 is preferably a planar plastic flange, integrally formed with housing 20, but may be constructed separately from housing 20 and attached thereto in any suitable fashion.

Referring now to both FIG. 3 and FIG. 4, at least one signal conductor 27 having one end 30 arranged in electrode connection region 18, and another end 31 arranged in medical device connection region 31, is operable to provide a signal path traversing heat-sealable flexible material 32. Signal conductor 27 is preferably an electrical conductor, such as a pin connector, insert-molded into housing 20, but may be any device now known or later developed capable of causing electrical signals, or representations thereof, to traverse heat-sealable flexible material 32. Signal conductor 27 may be disposed in housing sides 18, 19, heat-sealable flexible material 32, and/or sealing surface 22.

FIG. 5 depicts apparatus 10 in use with heat-sealable flexible material 32, in accordance with certain aspects of the present invention. As shown, side 19 of housing 20 is disposed on exterior 36 of heat-sealable flexible material 32. Two signal conductors 27 are arranged in medical device connection region 31 (partially visible). Housing side 18 (not visible) is disposed on interior 34 (also not visible) of heat-sealable flexible material 32.

Apparatus 10 is preferably inserted into a keyed, die-cut hole in material 32, and housing 20 is preferably attached to material 32 by heat-sealing sealing surface 22 to one or more surface(s) of laminates defining interior 34 and/or exterior 36 of material 32. Sealing surface 22, however, may also be attached in other ways—by application of hot-melt adhesive or double-sided adhesive tape, or ultrasonic welding, for example. A zone 38, preferably on a perimeter of material 32, is heat-sealable to form a container for storage of



electrode 12. For example, material 32 may be folded and sealed at zone 38, to form a sealed pouch-type container, with interior 34 forming the inside of the container. Apparatus 10 may be automatically inserted in material 32 before pouches are formed, at the sheet-stock stage, or may be installed after storage pouches or containers are formed from material 32.

5           After housing 20 has been attached to heat-sealable flexible material 32, and after at least one signal conductor 27 having ends 30, 31 is arranged in electrode connection region 18 and medical device connection region 31, respectively, to provide a signal path traversing material 32, then one or more electrodes 12 may be arranged in electrode connection region 18, in such a manner as to be responsive to end 30. For example, when signal conductor 27 is  
10   an electrical connector, such as a pin, electrode adapter 16 may be detachably coupled to the pin. Patient portion 13 and wireset 14 are preferably disposed relative to side 34 of material 32—preferably enclosed in a container formed at least in part by interior 34. The container may be hermetically sealed for electrode storage or transport.

          Communication between defibrillator 200 and packaged electrode 12 may be  
15   established via apparatus 10 when a portion of a medical device, such as energy delivery connector 211, is arranged in medical device connection region 19 and coupled to one more signal conductors 27. Thus, when an electrode 12 is packaged in accordance with aspects of the present invention, and when the medical device is coupled to signal conductors in region 31, in such a manner that the signal path traversing material 32 is operational, electrode 12  
20   remains responsive to the medical device during shipping, storage or use.

          For example, communication may be established between packaged electrode 12 and a medical device for purposes of testing the functionality of electrode 12 while the medical device is in standby mode, and the medical device and/or electrode 12 may be enabled to alarm if a problem is detected.

25           In another example, communication between packaged electrode 12 and the medical device may be used to monitor other parameters of interest, such as interior environmental conditions of electrode 12, or packaging thereof. Additional connections, such as signal conductors 27, could be used to facilitate monitoring such additional parameters.

          In a further example, apparatus 10 may provide communication between the medical  
30   device and packaged electrode 12 during normal operation of the medical device in connection with patient therapy. In the case of defibrillator 200 (shown in FIG. 2), electrode 12 may be placed patient 208 without detachment of electrode adapter 16 from apparatus 10, and defibrillator 200, may continue to provide/receive electrical communication and

information to/from electrode 12 via apparatus 10 during patient treatment and monitoring, without further user intervention.

Continuing to refer to FIG. 2, in a still further example, when electrode adapter 16 is detached from apparatus 10, electrode adapter 16 may be re-attached to apparatus 10, or may  
5 be attached directly to another device, such as another electrotherapy device (not shown) for use in care of patient 208.

Thus, apparatus 10 provides flexible manufacturing/assembly, a simple user interface that reduces set-up time to a minimum, and usability with heat-sealable flexible materials that enclose electrode wiresets without compromising enclosure seals. Electrodes packaged using  
10 apparatus 10 remain responsive to electrotherapy devices, and may be monitored for functionality and used for patient therapy without interruption of connection from the electrotherapy device.

The embodiment(s) depicted and described herein are meant to be illustrative in nature, and it will be understood that housings of any shapes and sizes may be designed using  
15 the principles set forth herein, and used for various commercial and consumer applications. It will also be understood that aspects of the invention are not limited to the specific embodiments described above, that other and further forms of the invention may be devised without departing from the spirit and scope of the appended claims and their equivalents, and that aspects described and claimed herein are to be accorded the widest scope consistent with  
20 the principles and features disclosed herein.

CLAIMS:

1. An apparatus (10) for packaging a medical electrode (12) having an electrode wireset (14), the apparatus (10) for use with a heat-sealable flexible material (32), the heat-sealable flexible material (32) having an interior side (34) and an exterior side (36), the interior side arrangeable to receive the electrode wireset (14), the apparatus (10) comprising:
  - a housing (20) comprising:
    - a first housing side (18) at least in part defining an electrode connection region (28), the electrode connection region (28) sized to receive the medical electrode, and
    - a second housing side (19) opposed to the first housing side (18), the second housing side (19) at least in part defining a medical device connection region (29), the medical device connection region sized to receive at least a part (211) of a medical device (200) that utilizes the medical electrode (12);
  - a sealing surface (22) having an attachment area (23) adapted for attachment to the heat-sealable flexible material (32), a first sealing surface side (24), and a second sealing surface side (26) opposed to the first sealing surface side (24), the first sealing surface side (24) coupled to the first housing side (18), and the second sealing surface side (26) coupled to the second housing side (19); and
  - a signal conductor (27) having a first end (30) and a second end (31), the signal conductor (27) operable to provide a signal path traversing the heat-sealable flexible material (32), the first end (30) arranged in the electrode connection region (28) and arranged to respond to the medical electrode (12), and the second end (31) arranged in the medical device connection region (29) and arranged to respond to the at least part of (211) the medical device (200),

wherein when the attachment area (23) is attached to the heat-sealable flexible material (32), the electrode connection region (28) is disposed on the interior side (34) of the heat-sealable flexible material (32) and the medical device connection region (29) is disposed on the exterior side (36) of the heat-sealable flexible material (32), and

wherein when the electrode (12) is arranged in the electrode connection region (28) and is responsive to the first end (30) of the signal conductor (27), and at the least part of (211) the medical device (200) is arranged in the medical device connection region (29) and is responsive to the second end (31) of the signal conductor (27), in such a manner that the

signal path is operating, the electrode (12) is responsive to the medical device (200) via the signal path.

2. The apparatus (10) according to claim 1, wherein when the electrode (12) is arranged in the electrode connection region (28), the electrode is detachably coupled to the first end (30) of the signal conductor (27).

3. The apparatus (10) according to claim 1, wherein when the electrode (12) is arranged in the electrode connection region (28) and is responsive to the first end (30) of the signal conductor (27), and at the least part of (211) the medical device (200) is arranged in the medical device connection region (29) and is responsive to the second end (31) of the signal conductor (27), in such a manner that the signal path is operating, the medical device (200) monitors functioning of the electrode (12) via the signal path.

4. The apparatus (10) according to claim 1, wherein the medical device (200) comprises an external defibrillator.

5. The apparatus (10) according to claim 1, wherein the heat-sealable flexible material (32) comprises a hermetically sealable pouch for storing the electrode.

6. The apparatus (10) according to claim 5, wherein when the electrode (12) is stored in the hermetically sealed pouch, the electrode wireset (14) is disposed on the interior side (36) of the heat-sealable flexible material.

7. The apparatus (10) according to claim 1, wherein the sealing surface (22) comprises a planar flange.

8. The apparatus (10) according to claim 7, wherein the attachment area (23) is interposed between the first housing side (18) and the second housing side (19).

9. The apparatus (10) according to claim 7, wherein the attachment area (23) is outside of a perimeter of the housing (20).

10. The apparatus (10) according to claim 1, wherein the signal conductor (27) comprises an electrical conductor.

11. The apparatus (10) according to claim 10, wherein the electrical conductor is disposed in one of the heat-sealable flexible material (32); the sealing surface (22) and the housing (20).

12. The apparatus (10) according to claim 11, wherein the electrical conductor comprises an electrical connector having the first end (30) disposed in the first housing side (18), and the second end (31) disposed in the second housing side (31).

13. The apparatus (10) according to claim 12, wherein the first end (30) and the second end (31) of the electrical connector are integral.

14. The apparatus (10) according to claim 12, wherein the electrical connector comprises a plurality of interconnected parts.

15. The apparatus (10) according to claim 1, wherein the at least part of (211) the medical device (200) comprises an electrical plug.

16. The apparatus (10) according to claim 1, wherein the housing (20) comprises a molded plastic housing.

17. The apparatus (10) according to claim 16, wherein the sealing surface (22) is integral to the molded plastic housing.

18. A method for packaging a medical electrode (12), comprising:  
providing a housing (20) comprising:

a first housing side (18) at least in part defining an electrode connection region (28), the electrode connection region (28) sized to receive the medical electrode (12);  
and

a second housing side (19) opposed to the first housing side (18), the second housing side (19) at least in part defining a medical device connection region (29), the medical device connection region (29) sized to receive at least a part of (211) a medical device (200) that utilizes the medical electrode (12);

providing a sealing surface (22) having an attachment area (23) adapted for attachment to the heat-sealable flexible material (32), a first sealing surface side (24), and a second sealing surface (26) side opposed to the first sealing surface side (24), the first sealing surface side (24) coupled to the first housing side (18), and the second sealing surface side (26) coupled to the second housing side (19);

arranging a first end (30) of a signal conductor (27) operable to provide a signal path traversing the heat-sealable flexible material (32) in the electrode connection region (28);

arranging a second end (31) of the signal conductor (27) in the medical device connection region (29);

attaching the attachment area (23) to a heat-sealable flexible (32) material in such a manner that the electrode connection region (28) is disposed on an interior side (34) of the heat-sealable flexible material (36) and the medical device connection region (29) is disposed on an exterior side (26) of the heat-sealable flexible material (32);

arranging the electrode (12) in the electrode connection region (18) in such a manner that when the at least part of (211) the medical device (200) is disposed in the medical device connection region (29), the signal path is operable and the electrode (12) is responsive to the medical device (200), and in such a manner that an electrode wireset (14) associated with the electrode (12) is disposed on the interior side (34) of the heat-sealable flexible material (32);  
and

after arranging the electrode (12), sealing the heat-sealable flexible material (32) to form a container for storage of the electrode (12), the interior side (34) of the heat-sealable flexible material (32) defining at least part of the inside of the container.

19. The method according to claim 18, further comprising the step of:

after sealing the heat-sealable flexible material (32), arranging the at least part of (211) the medical device (200) in the medical device connection region (29) in such a

manner that the signal path is operable and the electrode (12) is responsive to the medical device (200).

20. An electrotherapy device (200) comprising:  
a controller (204);  
an energy source (202);  
an energy delivery connector (211) responsive to the energy source (202);  
at least one medical electrode (12) having a wireset (14), the medical electrode (12) for attachment to a patient (208), the medical electrode (12) having packaging enclosing the wireset (14), the packaging comprising:  
a heat-sealable flexible material (32) defining a pouch, the heat-sealable flexible material (32) having an interior side (34), defining the inside of the pouch, and having an exterior side (36);  
a housing (20) comprising:  
a first housing side (18) defining an electrode connection region (28), disposed on the interior side (34) of the heat-sealable flexible material (32) and at least in part housing the medical electrode (12); and  
a second housing side (19) opposed to the first housing side (18), the second housing side (19) defining an electrotherapy device connection region (29), disposed on the exterior side (36) of the heat-sealable flexible material (32) and sized to receive the energy delivery connector (211);  
a sealing surface (22) having an attachment area (23) attached to the heat-sealable flexible material (32), a first sealing surface side (24), and a second sealing surface side (26) opposed to the first sealing surface side, the first sealing surface side (24) coupled to the first housing side (18), and the second sealing surface side (26) coupled to the second housing side (19); and  
a signal conductor (27) having a first end (30) and a second end (31), operable to provide a signal path traversing the heat-sealable flexible material (32), the first end (30) arranged in the electrode connection region (28) and coupled to the medical electrode (12), and the second end (31) arranged in the electrotherapy device connection region (29) and arranged for coupling to the energy delivery connector (211); and

an energy delivery system (206) operable by the controller (204) to deliver electrical energy to the electrode (12) via the signal path, when the energy delivery connector (211) is coupled to the second end (31) of the signal conductor (27).



**ABSTRACT**

An apparatus (10) for packaging a medical electrode (12) having an electrode wireset (14) is for use with a heat-sealable flexible material (32). The apparatus includes a housing (20), and the housing includes a first housing side (18) at least in part defining an electrode connection region (28) sized to receive the medical electrode, and a second housing side (19) opposed to the first housing side. The second housing side at least in part defines a medical device connection region (29), sized to receive at least a part of a medical device (211) that utilizes the medical electrode. A sealing surface (22) having an attachment area (23) is adapted for attachment to the heat-sealable flexible material. A signal conductor (27) having a first end and a second end is also included in the apparatus. The signal conductor is operable to provide a signal path traversing the heat-sealable flexible material.

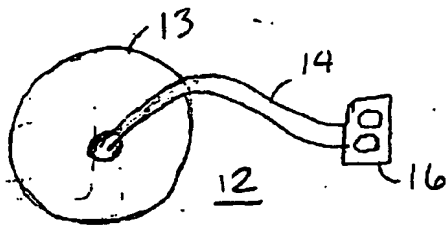


FIG. 1

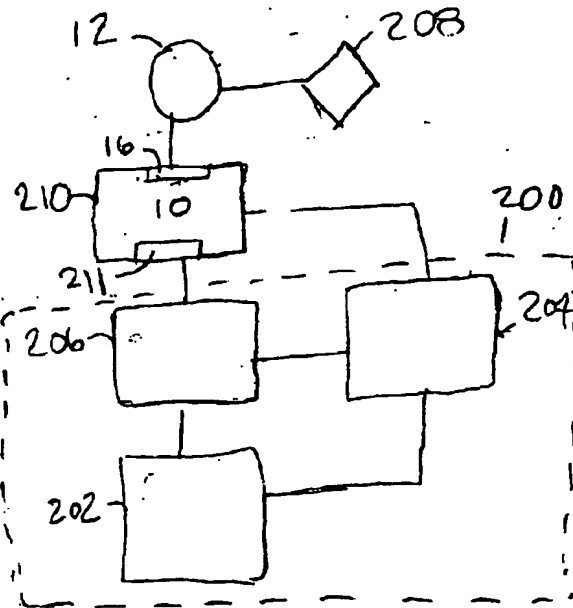


FIG. 2

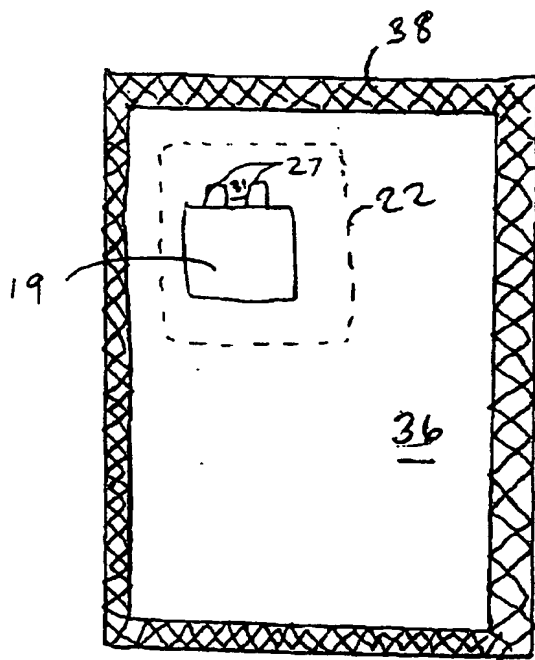


FIG. 3

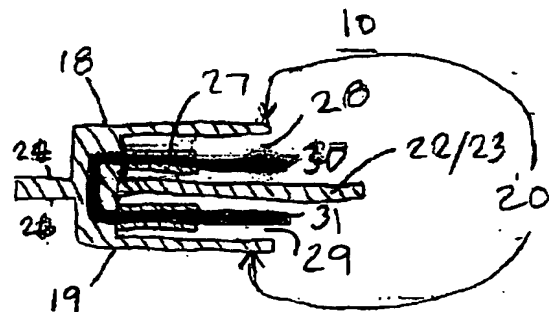


FIG. 4

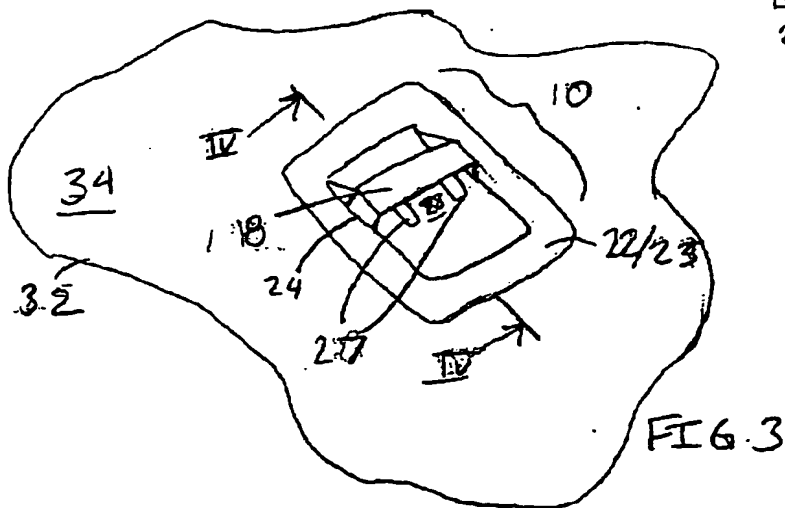


FIG. 5

# Document made available under the Patent Cooperation Treaty (PCT)

International application number: PCT/IB04/051705

International filing date: 07 September 2004 (07.09.2004)

Document type: Certified copy of priority document

Document details: Country/Office: US  
Number: 60/509,011  
Filing date: 06 October 2003 (06.10.2003)

Date of receipt at the International Bureau: 13 September 2004 (13.09.2004)

Remark: Priority document submitted or transmitted to the International Bureau in compliance with Rule 17.1(a) or (b)



World Intellectual Property Organization (WIPO) - Geneva, Switzerland  
Organisation Mondiale de la Propriété Intellectuelle (OMPI) - Genève, Suisse